


**Series 8, Built-in oven, 60 x 60 cm,
Black
HBG7741B1A**

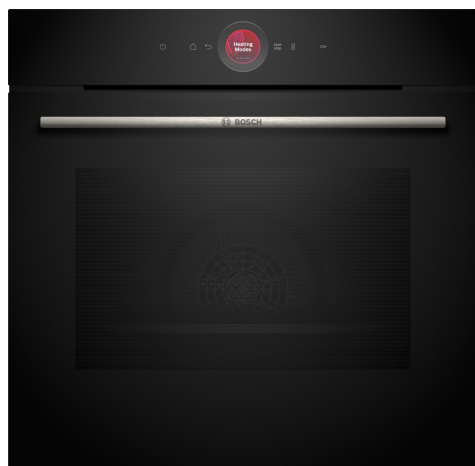

HEZ915003 Glass roasting dish, 5,4 L, HEZ636000 Glass pan, HEZ638070 Full ext rails, level independent, pyro, HEZ660060 Strip, HEZ664000 Baking and roasting grid, steam, HEZ327000 Pizza stone, HEZ32WA00 Wireless food thermometer, HEZ531010 Baking tray, non-stick ceramic coated, HEZ532010 Universal pan, non-stick ceramic coated, HEZ617000 Pizza pan, enamelled, HEZ629070 Air Fry & Grill tray, HEZ631070 Baking tray, enamelled, HEZ632070 Multipurpose pan, enamelled, HEZ633001 Lid for professional pan, enamelled, HEZ633070 Professional pan with grid, enamelled, HEZ633073 Professional pan, enamelled, HEZ634000 Baking and roasting grid

The built-in oven with Digital Control Ring and TFT-touchdisplay. Air Fry with Air Fry tray and Home Connect.

- **TFT Touch Display:** easy control thanks to an innovative Digital Control Ring and TFT touchscreen.
- **Air Fry Function with tray:** for perfectly fried foods, such as vegetables and chips.
- **Digital Control Ring:** the simple and innovative way to select oven settings.
- **Pyrolytic self-cleaning:** less cleaning effort thanks to automatic self-cleaning.
- **Cleaning Assistance:** less cleaning effort

Color / Material Front: Black
Built-in / Free-standing: Built-in
Door opening: Drop down
Integrated Cleaning system: Pyrolytic+Hydrolytic
Control Panel Material: Glass
Door Material: Glass
Dimensions: 595x594x548 mm
Dimensions of the packed product (HxWxD): 670 x 670 x 680 mm
Required niche size for installation (HxWxD): 585-595 x 560-568 x 550 mm
Cavity dimensions: 357 x 480 x 415 mm
Usable volume of cavity: 71 l
Number of interior lights: 1
Net weight: 37.7 kg
Gross weight: 40.3 kg
EAN code: 4242005326570
Connection rating: 3600 W
Fuse protection: 16 A
Voltage: 220-240 V
Frequency: 50; 60 Hz
Length electrical supply cord: 120.0 cm



4 242005 326570

Series 8, Built-in oven, 60 x 60 cm, Black HBG7741B1A

The built-in oven with Digital Control Ring and TFT-touchdisplay. Air Fry with Air Fry tray and Home Connect.

Heating Functions

- Oven with 14 heating methods: Defrost
- Air Fry Full width grill Hotair gentle 3D Hotair Half width grill Top/Bottom heating Conventional heat gentle Pizza setting Low temperature / slow cooking Bottom heating Hot-air grilling Pre-Heating Keep warm
- Automatic rapid heat function
- Temperature range 30 °C - 300 °C

Racks and Rails

- Number of shelf levels: 5
- Telescopic rails: telescopic rails available as optional accessory, Pyrolytic telescopic rail - full extension, full adjustment to any shelf level

Design

- Anthracite enamel cavity with 5 shelf positions
- Digital Touch Control Ring
- Touch control
- TFT-Touchdisplay (45 mm x 45 mm)
- Switch for oven illumination, Halogen lighting
- Cavity volume: 71 l
- Cooling fan

Cleaning

- Pyrolytic cleaning function
- Easy Clean cleaning program
- Full glass inner door - safe touch door

Convenience

- Built in cooking functions: Bosch Assist - automatic oven sensor cooking technology
- Oven Assistant with Voice Control: With the use of Amazon Alexa or Google home, once fully set up.
- Electronic clock/timer with end time programming
- Automatic Temperature control for each function
- Temperature control indicator Actual temperature display
- SoftMove oven door with soft close, Drop down oven door with SoftOpen and SoftClose, Bottom hinged door
- HomeConnect ready on Wi-Fi, iService Remote: Our local service team can assist and support with any issues, but using Home Connect and digital access to your oven via the internet
- Home Connect helps you to unleash your cooking creativity by allowing you to manage your oven, warming drawer and coffee machine over your Wi-Fi. Tap via the app, speak to your oven with voice control, and make appliances interact with one another automatically. Home Connect is an ever-growing platform that brings the future to your kitchen Once connected with the Home Connect App, your oven will have the full benefits of being able to complete software updates, enabling your oven to have the latest software

Safety Features

- Low door temperature during pyrolytic cleaning
- Quadruple glass door panel glazed, Low door temperature when in use.
- Child lock
- Residual heat indicator Automatic switch off Start button Door contact safety switch Door lock

Accessories

- Air Fry & Grill tray, combination grid, universal pan

Technical Information


- Length of mains cable: 120 cm
- Nominal voltage: 220 - 240 V
- Total connected load electric: 3.6 KW

Dimensions:


- Appliance dimension (HxWxD): 595 mm x 594 mm x 548 mm
- Installation dimensions (HxWxD): 585 mm - 595 mm x 560 mm - 568 mm x 550 mm
- Please reference the built-in dimensions provided in the installation drawing

**Series 8, Built-in oven, 60 x 60 cm,
Black
HBG7741B1A**


Installing two appliances on top of each other
other
Air exchange

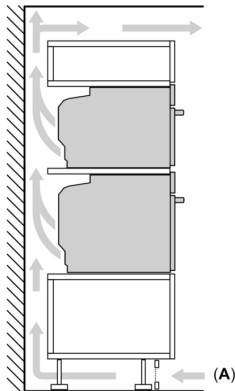

A: Air inlet $\geq 200 \text{ cm}^2$

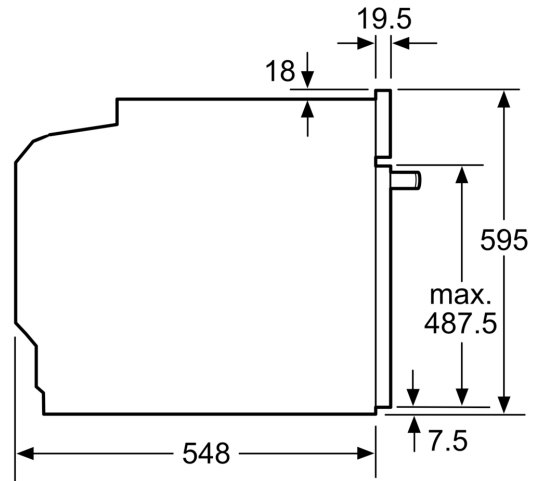

measurements in mm

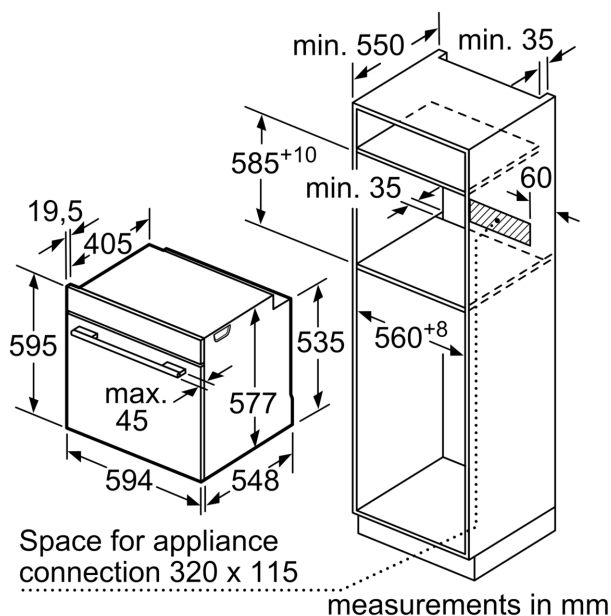

If the appliance will be installed underneath a hob, the following worktop thicknesses (including substructure if necessary) must be taken into account.

Hob type	min. worktop thickness	
	fitted	flush
Induction hob	37 mm	38 mm
Full surface Induction hob	47 mm	48 mm
Gas hob	30 mm	38 mm
Electric hob	27 mm	30 mm

